


## 便携式pH分析仪

### MARK® 903

Is a portable meter for measuring of pH, mV and temperature of water and aqueous solutions.

Mark-903 便携式PH分析仪,适用于pH mV 温度测量, 包括水及水性溶液

- **IP65** 防护等级IP65,紧凑防水便携式以便于干/湿环境使用  
Compact waterproof handheld meter allows use in dirty and wet environment.  
测量简单, 精度高
- **Convenience and accuracy of measurement**  
Automatic temperature compensation.  
Two-buffers calibration, buffer auto recognition.  
自动温度补偿, 2点校准, 自动识别标液
- **Introspection system** 自检系统
- **Scratchpad** 自带数据存储功能  
Non-volatile memory up to 500 data points. 能存储500条数据点
- **USB port and related software** USB接口及相关软件  
The ability to create and manage archive data on a PC.  
可以通过PC电脑创建及管理数据
- **Graphic LCD display with backlight** 带背光LCD及图形LCD  
Easy input of all parameters by keypad. 易于通过键盘输入所有参数
- **Protective case for electrodes, for safe measuring, store and transportation**  
电极保护壳, 安全测量, 存储及搬运
- **Low power consumption**  
Battery lifespan up to 600 hours of work.  
电池寿命长, 600小时工作寿命

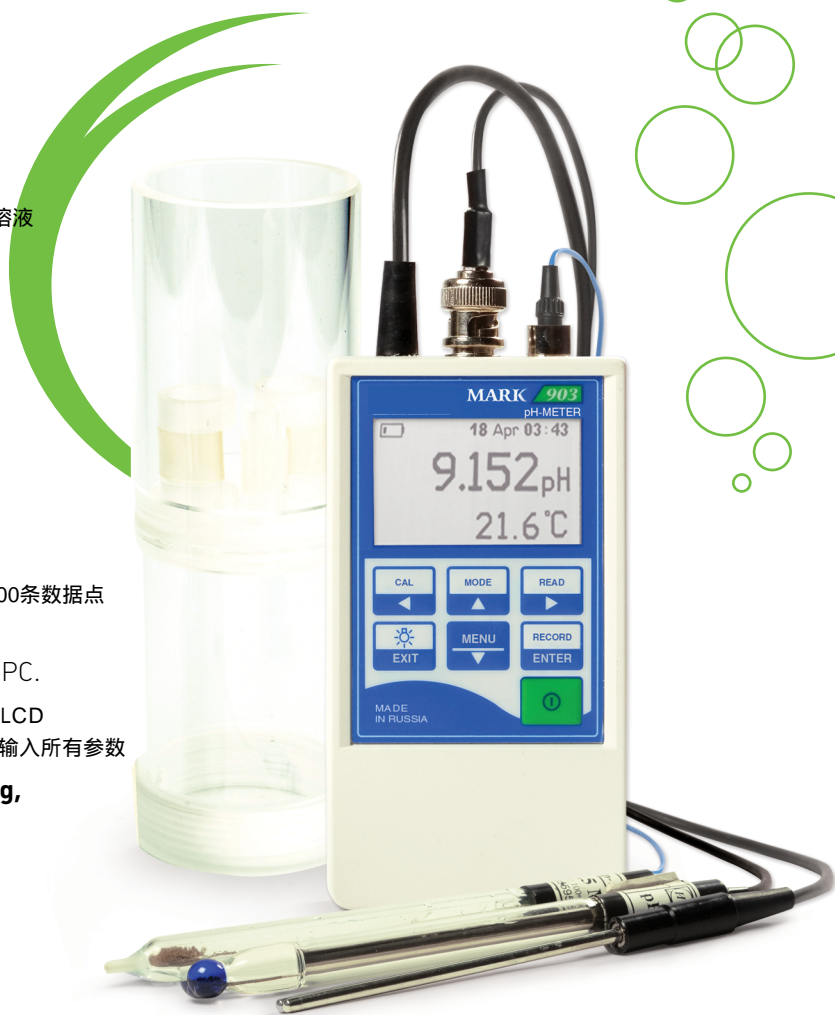

#### SPECIFICATION 技术规格

	Measuring range 测量范围	Resolution 分辨率	Accuracy 精度
pH	0-15 <sup>1</sup> 0-12 <sup>2</sup>	0,001	±0,02 <sup>1</sup> ±0,05 <sup>2</sup>
mV	-1000/+1000	0,1	±0,5
Temperature, °C	0-70 *	0,1	±0,3

<sup>1</sup> for converting unit, <sup>2</sup> the pH-meter with the sensor incorporated, \*automatic temperature compensation range

	Converting unit
Dimensions, mm	65*130*28
Weight, g 重量,克	120
Port	USB
Power supply	battery type AA – 2 pcs.

#### ENVIRONMENT REQUIREMENTS

Temperature, °C	5-50
-----------------	------

The company reserves the right to make changes into the products configuration without their performance degradation

order information



#### BASIC KIT

Converting unit with a temperature sensor  
Combined electrode  
ESK 10601/7  
Battery type AA – 2 pcs.  
Operation manual

#### OPTIONALLY

Protective case K 901